

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
21 February 2002 (21.02.2002)

PCT

(10) International Publication Number
WO 02/14605 A2

- (51) International Patent Classification⁷: **D21H 27/02**, 25/00
- (74) Agent: CASSIDY, Timothy, A.; Dority & Manning, P.A., P.O. Box 1449, 55 Beattie Place, Suite 1600, One Liberty Square, Greenville, SC 29602 (US).
- (21) International Application Number: PCT/US01/41701
- (22) International Filing Date: 14 August 2001 (14.08.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/641,100 17 August 2000 (17.08.2000) US
09/641,355 17 August 2000 (17.08.2000) US
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant: **KIMBERLY-CLARK WORLDWIDE, INC.** [US/US]; 401 North Lake Street, Neenah, WI 54956 (US).
- (72) Inventors: **CHEN, Patrick, P.**; 10 Timberline Court, Appleton, WI 54913 (US). **SPRANGERS, Daniel, R.**; W441 Cindy Ann Lane, Kaukauna, WI 54130 (US). **BURAZIN, Mark, A.**; 35 East County Road Y, Apt. 3, Oshkosh, WI 54901 (US). **SCHROEDER, Wen**; 232 East Carrington Lane, Appleton, WI 54913 (US).
- Published:**
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TISSUE WITH SURFACES HAVING ELEVATED REGIONS

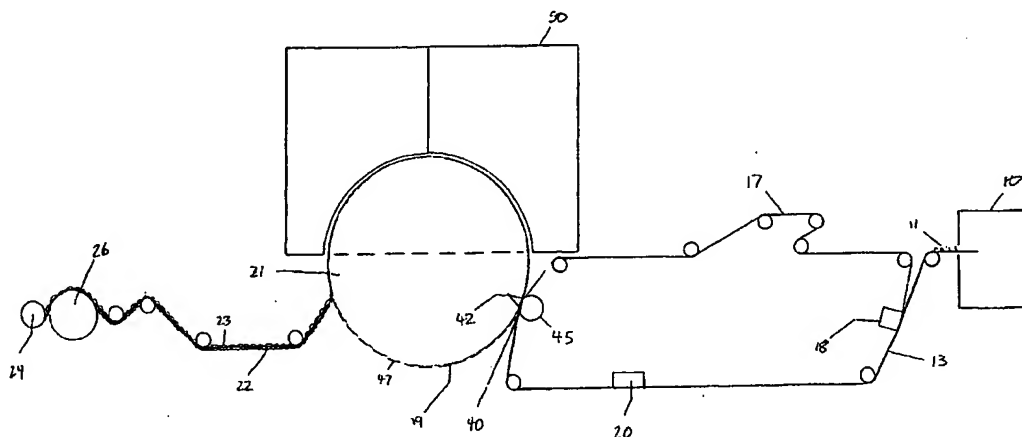

(57) Abstract: A tissue with two surfaces having elevated regions is provided. The elevated regions can be imparted onto the surfaces of the tissue utilizing various papermaking techniques and devices, such as using patterned fabrics, wire-mesh, and/or pressure rolls. A tissue of the present invention can have a substantial fiber density gradient in the -z direction and a relatively low fiber density gradient in the x-y plane. Moreover, the tissue can also have a substantial pore size distribution gradient in the -z direction and a relatively low pore size distribution gradient in the x-y plane for improved absorption properties.

WO 02/14605 A2

TISSUE WITH SURFACES HAVING ELEVATED REGIONS

Background of the Invention

5 Consumers use paper wiping products, such as tissues, for a wide variety of applications. For example, various types of tissues can be used for applications, such as for nose care, cosmetics, eyeglass cleaning, etc. Typically, a user of such tissues requires that the tissues possess a relatively soft feel. Moreover, a user often desires that the tissue be capable of absorbing a certain amount of a liquid without substantially wetting the user's hand during use. In the past, various mechanisms have been utilized to produce tissues having a soft feel. For example, in many cases, a tissue is softened through the application of a chemical additive (i.e., softener) that is capable of enhancing the soft feel of the tissue product. Moreover, in other instances, a side of the tissue is
10
15 imparted with domes to provide a softer feel.

In the past, domes were typically imparted onto a tissue surface by the application of pressure. For instance, one prior art tissue forming process is described in U.S. Patent No. 5,556,509 to Trokhan, et al., which is incorporated herein in its entirety by reference thereto. Trokhan
20 describes a process for forming a web by adhering the web to a surface of a heated dryer drum and pressing it between the drum and a roller at a nip to form a web surface with different elevations. Thereafter, the web is creped from the dryer and wound up at a reel. However, one problem with such conventional tissues is that they typically have a "two-sided" feel. Moreover, such conventional tissues also generally have relatively poor
25 absorption properties. For example, a conventional tissue, such as described above, is generally characterized as having relatively high density regions and relatively low regions. Accordingly, these conventional tissues possess a substantial fiber density gradient in the x-y
30 plane (or the plane formed by the machine direction and cross-machine

direction), while possessing a relatively low fiber density gradient in the -z direction so that a higher density gradient exists in the x-y plane than in the -z direction.

5 As a result of such density gradients, the conventional tissues discussed above also have a substantial pore size distribution gradient in the x-y plane and a relatively low pore size distribution gradient in the -z direction so that a higher pore size distribution gradient exists in the x-y plane than in the -z direction. For example, a conventional tissue has larger pores formed by the regions and smaller pores formed by the regions. However, because liquids normally flow at a faster rate through larger pores than smaller pores, a user's hand can be easily wetted when using the prior art tissues. Specifically, water can flow readily flow through the pores of the regions onto a user's hand.

10 As such, a need currently exists for an improved tissue that possesses a soft feel and has good absorption properties.

Summary of the Invention

The present invention is generally directed to a tissue with surfaces having elevated regions. In particular, a tissue of the present invention includes one surface with one topography and another surface with a different topography.

20 In general, the present invention is directed to a tissue having "elevated regions" on two surfaces. As used herein, "elevated regions" generally refer to any type of shape imparted onto a tissue surface including, but not limited to, dome, parabola, hyperbola, inverted cone, multiples or combinations thereof or variable contour shapes. In particular, a tissue of the present invention can be provided with two surfaces having elevated regions so that the surfaces have at least one different topographical characteristic, such as a different pitch depth, number (i.e., number of elevated regions in a given area), pitch width, direction, shape, etc.

To form elevated regions onto each tissue surface, a variety of well-known papermaking techniques and devices can be utilized. In particular, devices containing protrusions, such as patterned fabrics, patterned rolls, wire-mesh, etc., can be provided to form elevated regions on the surface of a tissue when contacted therewith. Moreover, various papermaking techniques, such as through-air drying, creping, embossing, calendering, etc., can be utilized when forming the tissue.

In one particular embodiment, for example, the tissue can be formed utilizing a technique known as uncreped through-air drying. In this embodiment, a fibrous web is first deposited onto a forming fabric. From the forming fabric, the web is then transferred to a transfer fabric with the assistance of a vacuum box or shoe, if desired. During this transfer stage (i.e., "rush transfer"), the consistency of the web is typically less than about 35% dry weight, and particularly between about 15% to about 30% dry weight.

In one embodiment, the transfer fabric can also be provided with protrusions, as stated above, to impart elevated regions onto one surface of the tissue. The protrusions of the transfer fabric can generally vary as desired. For example, the transfer fabric can have protrusions of a pitch depth greater than about 0.010 mm, particularly between about 0.025 to about 2 mm, and more particularly between about 1 to about 1.8 mm; and a pitch width greater than about 0.001 mm, particularly between about 0.005 to about 5 mm, and more particularly between about 0.25 mm to about 2.5 mm. In addition, the transfer fabric can also have differing protrusion directions, number per unit area, shapes, etc.

From the transfer fabric, the fibrous web is then transferred to a through-air dryer to substantially dry the web, although other dryers are equally suitable. In some embodiments, for example, the web can be transferred from the transfer fabric to the through-air dryer at a consistency

less than about 60% by weight, and particularly between about 25% to about 50% dry weight.

The through-air dryer, in some instances, can also contain a device for imparting elevated regions onto a surface of the tissue. For example, the device can be a wire-mesh surface or a patterned fabric wrapped around the through-air dryer. In one embodiment, a through-air drying fabric can be utilized that has certain protrusions of a pitch depth greater than about 0.010 mm, particularly between about 0.025 to about 2 mm, and more particularly between about 1 to about 1.8 mm; and a pitch width greater than about 0.001 mm, particularly between about 0.005 to about 5 mm, and more particularly between about 0.25 to about 2.5 mm. In addition, the through-air drying fabric can also have differing protrusion directions, number per unit area, shapes, etc.

As stated, in another embodiment, the through-air dryer can contain wire-mesh that also has spaces defined by certain wire protrusions. For instance, in most embodiments, the wire-mesh is formed such that the spaces make up at least about 20% of the overall area of the total wire-mesh surface area. In one embodiment, for example, the wire-mesh surface can contain wire protrusions having a diameter of about 0.029 mm and also spaces defined by the protrusions having an area of about 0.005 mm².

In some embodiments, other devices, such as a pressure roll, can also be utilized to apply pressure to one or more surfaces of the tissue. For instance, in one embodiment, a pressure roll can press the tissue against the through-air dryer as the tissue travels through a nip. The pressure roll can have a smooth or patterned surface, or can have a smooth or patterned fabric wrapped around the roll. Moreover, in some embodiments, the pressure roll can apply a pressure less than about 60 pounds per square inch (psi), and particularly between about 35 to about 40 psi, to one or more surfaces of the tissue.

As stated, the tissue of the present invention is generally formed with two surfaces having elevated regions. In particular, each surface includes elevated regions having at least one different topographical characteristic, such as, pitch depth, pitch width, number per unit area, direction, etc. For instance, in some embodiments, one surface of the tissue has at least about 50% more elevated regions per square inch than the other surface of the tissue, and particularly between about 50% to about 300%. Further, the pitch depth of the elevated regions of one surface of the tissue, in some embodiments, is between about 20% to about 100% greater than the pitch depth of the elevated regions of the other surface of the tissue.

Moreover, a tissue of the present invention has a substantial fiber density gradient in the -z direction. Further, a tissue of the present invention can also have a relatively low fiber density gradient in the x-y plane so that a higher density gradient exists in the -z direction than in the x-y plane. By providing a tissue with such a fiber density gradient(s), the resulting tissues can have a variety of improved characteristics, such as improved absorbency. In particular, tissues of the present invention can also have a substantial pore size distribution gradient in the -z direction and a relatively low pore size distribution gradient in the x-y plane so that a higher pore size distribution gradient exists in the -z direction than in the x-y plane. For instance, by having a substantial pore size distribution gradient in the -z direction, the tissue can absorb liquids at a slower rate. Further, as a result of having a relatively low pore size distribution density gradient in the x-y plane, the tissue can also act as a liquid transfer barrier for liquid flowing through the tissue.

Other features and aspects of the present invention are discussed in greater detail below.

Brief Description of the Drawings

A full and enabling disclosure of the present invention, including the best mode thereof, directed to one of ordinary skill in the art, is set forth more particularly in the remainder of the specification, which makes
5 reference to the appended figures in which:

Figure 1 is schematic diagram of one embodiment for forming elevated regions onto the surfaces of a tissue of the present invention;

Figure 2 is a cross-sectional view of one embodiment for forming elevated regions onto a surface of a tissue of the present invention;

10 Figure 3 is a cross-sectional view of another embodiment for forming elevated regions onto a surface of a tissue of the present invention;

Figure 4 is another cross-sectional view of the embodiment illustrated in Figure 3;

15 Figure 5A is a perspective view of a patterned fabric that can be used to form one embodiment of a tissue of the present invention;

Figure 5B is a perspective view of wire-mesh that can be used to form one embodiment of a tissue of the present invention;

20 Figure 6A is a cross-sectional view of the fiber densities of various regions of a prior art tissue;

Figure 6B is a cross-sectional view of the pore size distributions of various regions of the prior art tissue illustrated in Figure 6A;

Figure 7A is a cross-sectional view of the fiber densities of various regions of one embodiment of a tissue of the present invention; and

25 Figure 7B is a cross-sectional view of the pore size distributions of various regions of one embodiment of a tissue made of the present invention.

30 Repeat use of reference characters in the present specification and drawings is intended to represent same or analogous features or elements of the invention.

Detailed Description of Representative Embodiments

Reference now will be made in detail to various embodiments of the invention, one or more examples of which are set forth below. Each example is provided by way of explanation of the invention, not limitation
5 of the invention. In fact, it will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the scope or spirit of the invention. For instance, features illustrated or described as part of one embodiment, can be used on another embodiment to yield a still further embodiment. Thus, it is
10 intended that the present invention covers such modifications and variations as come within the scope of the appended claims and their equivalents.

In general, the present invention is directed to a tissue having "elevated regions" onto two surfaces. For example, a tissue of the present
15 invention can include two surfaces having elevated regions with topographies that differ with respect to at one topographical characteristic, such as pitch depth, number (i.e., number of elevated regions in a given area), pitch width, direction, etc.

In general, any of a variety of tissues or other types of paper webs
20 can be formed with elevated regions in accordance with the present invention. For example, the tissue can be a single or multi-ply tissue. Normally, the basis weight of a tissue of the present invention is less than about 120 grams per square meter (gsm), particularly less than about 60
25 gsm, particularly from about 10 to about 50 gsm, and more particularly between about 15 to about 35 gsm.

Moreover, a tissue of the present invention can generally be formed from any of a variety of materials. In particular, a variety of natural and/or
synthetic fibers can be used. For example, some suitable natural fibers can include, but are not limited to, nonwoody fibers, such as abaca, sabai
30 grass, milkweed floss fibers, pineapple leaf fibers; softwood fibers, such as

northern and southern softwood kraft fibers; and hardwood fibers, such as eucalyptus, maple, birch, aspen, and the like. Illustrative examples of other suitable pulps include southern pines, red cedar, hemlock, and black spruce. Exemplary commercially available long pulp fibers suitable for the present invention include those available from Kimberly-Clark Corporation under the trade designations "Longlac-19". In addition, furnishes including recycled fibers may also be utilized. Moreover, some suitable synthetic fibers can include, but are not limited to, hydrophilic synthetic fibers, such as rayon fibers and ethylene vinyl alcohol copolymer fibers, as well as hydrophobic synthetic fibers, such as polyolefin fibers.

In addition, a tissue of the present invention can generally be formed utilizing any of a variety of papermaking processes. In particular, it should be understood that the present invention is not limited to any particular papermaking process. In fact, any process capable of forming a paper web can be utilized in the present invention. For example, a papermaking process of the present invention can utilize creping, embossing, wet-pressing, through-air-drying, creped through-air-drying, uncreped through-air-drying, single recreping, double recreping, calendering, as well as other steps in forming the tissue.

In this regard, one particular embodiment for forming a tissue of the present invention will now be described. Specifically, the embodiment described below relates to one method for forming the tissue of the present invention with elevated regions utilizing a papermaking technique known as uncreped through-drying. Examples of such a technique are disclosed in U.S. Patent Nos. 5,048,589 to Cook, et al.; 5,399,412 to Sudall, et al.; 5,510,001 to Hermans, et al.; 5,591,309 to Rugowski, et al.; and 6,017,417 to Wendt, et al., which are incorporated herein in their entirety by reference thereto. Uncreped through-air drying generally involves the steps of: (1) forming a furnish of cellulosic fibers, water, and optionally, other additives; (2) depositing the furnish on a traveling

foraminous belt, thereby forming a fibrous web on top of the traveling foraminous belt; (3) subjecting the fibrous web to through-drying to remove the water from the fibrous web; and (4) removing the dried fibrous web from the traveling foraminous belt.

5 For example, referring to Figure 1, one embodiment of a papermaking machine that can be used in the present invention is illustrated. For simplicity, the various tensioning rolls schematically used to define the several fabric runs are shown but not numbered. As shown, a papermaking headbox 10 can be used to inject or deposit a stream of an aqueous suspension of papermaking fibers onto a forming fabric 13, which serves to support and carry the newly-formed wet web 11 downstream in the process as the web is partially dewatered to a consistency of about 10 dry weight percent. Additional dewatering of the wet web can be carried out, such as by vacuum suction, while the wet web is supported by the forming fabric. The headbox 10 may be a conventional headbox or may be a stratified headbox capable of producing a multilayered unitary web. Further, multiple headboxes may be used to create a layered structure, as is known in the art.

20 Forming fabric 13 can generally be made from any suitable porous material, such as metal wires or polymeric filaments. Suitable fabrics can include, but are not limited to, Albany 84M and 94M available from Albany International of Albany, N.Y.; Asten 856, 866, 892, 959, 937 and Asten Synweave Design 274, available from Asten Forming Fabrics, Inc. of Appleton, Wis. The fabric can also be a woven fabric as taught in U.S. Patent No. 4,529,480 to Trokhan, which is incorporated herein in its entirety by reference thereto. Forming fabrics or felts comprising nonwoven base layers may also be useful, including those of Scapa Corporation made with extruded polyurethane foam such as the Spectra Series. Relatively smooth forming fabrics can be used, as well as textured fabrics suitable for imparting texture and basis weight variations to the

30

web. Other suitable fabrics may include Asten 934 and 939, or Lindsey 952-S05 and 2164 fabric from Appleton Mills, Wis.

5 The wet web 11 is then transferred from the forming fabric 13 to a transfer fabric 17. As used herein, a "transfer fabric" is a fabric which is positioned between the forming section and the drying section of the web manufacturing process. The transfer fabric 17 typically travels at a slower speed than the forming fabric 13 in order to impart increased stretch into the web. The relative speed difference between the two fabrics can be from 0% to about 80%, particularly greater than about 10%, more
10 particularly from about 10% to about 60%, and most particularly from about 10% to about 40%. This is commonly referred to as "rush" transfer. One useful method of performing rush transfer is taught in U.S. Pat. No. 5,667,636 to Engel et al., which is incorporated herein in its entirety by reference thereto.

15 Transfer may be carried out with the assistance of a vacuum shoe 18 such that the forming fabric 13 and the transfer fabric 17 simultaneously converge and diverge at the leading edge of the vacuum slot. For instance, the vacuum shoe 18 can supply pressure at levels between about 10 to about 25 inches of mercury. The vacuum transfer
20 shoe 18 (negative pressure) can be supplemented or replaced by the use of positive pressure from the opposite side of the web to blow the web onto the next fabric. In some embodiments, other vacuum shoes, such as a vacuum shoe 20, can also be utilized to assist in drawing the fibrous web 11 onto the surface of the transfer fabric 17. During rush transfer, the
25 consistency of the fibrous web 11 can vary. For instance, when assisted by the vacuum shoe 18 at vacuum level of about 10 to about 25 inches of mercury, the consistency of the web 11 may be up to about 35% dry weight, and particularly between about 15% to about 30% dry weight.

30 Although not required, in some embodiments, the transfer fabric 17 is a patterned fabric having protrusions or impression knuckles, such as

described in U.S. Patent No. 6,017,417 to Wendt et al., which is incorporated herein in its entirety by reference thereto. For instance, referring to Figures 2 and 5A, a patterned transfer fabric 17 can have protrusions 37 that allows the fibrous web 11 to be imparted with elevated regions as it is pressed into contact with the transfer fabric 17. Thus, one surface of the fibrous web can be imparted with elevated regions, such as shown in Figures 7A-7B.

When utilized, a patterned transfer fabric 17 can generally have any pattern desired. For instance, a pattern for the transfer fabric 17 may imprint the fibrous web 11 with between about 5 to about 300 elevated regions per square inch. Moreover, the protrusions 37 may have a pitch depth "a" greater than about 0.010 mm, particularly between about 0.025 to about 2 mm, and more particularly between about 1 to about 1.8 mm; and a pitch width "b" greater than about 0.001 mm, particularly between about 0.005 to about 5 mm, and more particularly between about 0.25 to about 2.5 mm. In some embodiments, the transfer fabric can have a wire-mesh surface, as is well known in the art. For example, in one embodiment, the transfer fabric has a wire-mesh surface where the wire has a diameter of 1.14 millimeters and a "mesh-count" of 8 x 13. As used herein, the mesh-count refers to the number of open spaces formed per inch by the wire-mesh in a certain direction. Thus, a mesh-count of 8 x 13, for example, can refer to a wire-mesh with 8 spaces in length and 13 spaces in width. The transfer fabric 17 can also have protrusions 37 in more than one plane, if desired, to provide elevated regions having differing pitch depths. However, it should be understood that the method of the present invention is not limited to any particular spacing, amount, or size of protrusions 37. In addition, the transfer fabric 17 can also possess protrusions 37 positioned at any desired angle. For instance, the pitch direction of the protrusions can be in the machine direction, or at an angle up to about 45° from the machine direction. However, other angles can be

utilized, particularly when forming a tissue having a more complex or irregular surface topology. Moreover, the pitch direction of different protrusions 37 of the transfer fabric 17 can also be positioned at different angles as well.

5 From the transfer fabric 17, the fibrous web 11 is then transferred to the through-air dryer 21, optionally with the aid of a vacuum transfer shoe 42 or roll. The vacuum transfer roll or shoe 42 (negative pressure) can also be supplemented or replaced by the use of positive pressure from the opposite side of the web to blow the web onto the next fabric. The web 11
10 is typically transferred from the transfer fabric 17 to the through-air dryer 21 at the nip 40 at a consistency less than about 60% by weight, and particularly between about 25% to about 50% dry weight.

 In some embodiments, as shown in Figure 1, a pressure roll 45 can be utilized to press the web 11 against the through-air dryer 21 at a nip 40.
15 The roll 45 can be made of any of a variety of materials, such as of steel, aluminum, magnesium, brass, or hard urethane.

 In general, the surface of the pressure roll 45 can vary depending on the characteristics of the papermaking process. In particular, when the "roll side" of the fibrous web 11 is previously imparted with domes by a
20 patterned transfer fabric 17, it may be more desirable that the pressure roll 45 have a smooth surface. As used herein, the "roll side" of the fibrous web refers to the side of the web 11 facing the pressure roll 45 at the nip 40. When utilized, a smooth-surfaced pressure roll 45 can be accomplished in a variety of well-known ways. For example, the pressure
25 roll 45 itself can have a relatively smooth surface. Moreover, in some instances, a relatively smooth fabric can be wrapped around the pressure roll 45.

 On the other hand, in some embodiments, the pressure roll 45 can have a patterned surface or be wrapped with a patterned fabric, as is well
30 known in the art. For example, a patterned pressure roll 45 may be

utilized to impart elevated regions onto the "roll side" of the fibrous web when the transfer fabric 17 has a smooth surface. However, it should be understood that a patterned pressure roll 45 is not necessarily required.

As stated, the surface of the pressure roll 45, whether smooth or patterned, generally presses the fibrous web 11 against the through-dryer 21 at the nip 40. In general, the pressure roll 45 can press the web 11 against the dryer 21 at a variety of pressures. For instance, in some embodiments, a roll pressure less than about 60 pounds per square inch (psi), and particularly between about 35 to about 40 psi, can be utilized.

In most embodiments, the through-air dryer 21 is provided with a patterned surface to impart domes onto the "dryer side" of the web 11. As opposed to the "roll side", the "dryer side" of the web 11 generally refers to the side of the fibrous web 11 facing the dryer 21 at the nip 40. To impart elevated regions onto the dryer side of the web 11, a patterned surface for the through-air dryer 21 can be provided in a variety of ways. For instance, in some embodiments, the through-air dryer 21 can be formed with a wire-mesh surface, such as well known in the art, to impart a surface with elevated regions onto the "dryer side" of the web. In one particular embodiment, for example, as shown in Figure 5B, the through-air dryer 21 has a wire-mesh surface in which the wire 47 has a diameter of about 0.029 mm and the spaces 49 defined by the wire have an area of about 0.005 mm². In another embodiment, the wire 47 has a diameter of about 1 mm and a mesh-count of 4 x 4. Moreover, in most embodiments, the wire-mesh is formed such that the open spaces 49 make up at least about 20% of the overall area of the total wire-mesh surface area. It should be understood, however, that wire-mesh surfaces of a variety of sizes may be suitable for use in the present invention.

In other embodiments, the through-air dryer 21 may also be provided with a through-air drying fabric 19, such as depicted in Figures 1 and 3-4. The through-air drying fabric 19 can travel at about the same

speed or a different speed relative to the transfer fabric 17. For example, if desired, the through-air drying fabric 19 can run at a slower speed to further enhance stretch.

5 As stated, when utilized, the through-air drying fabric 19 is typically provided with various protrusions or impression knuckles to impart a surface with elevated regions onto the "dryer side" of the fibrous web. Some examples of such fabrics are described in U.S. Patent No. 6,017,417 to Wendt et al.. The through-air drying fabric 19 may be woven or nonwoven. In general, the patterned through-air drying fabric 19 can
10 have any pattern desired. For instance, protrusions 47 of the through-air drying fabric 19 may imprint the fibrous web 11 with between about 5 to about 300 elevated regions per square inch. Moreover, the protrusions 47 may have a pitch depth "a" greater than about 0.010 mm, particularly between about 0.025 to about 2 mm, and more particularly between about
15 1 to about 1.8 mm; and a pitch width "b" greater than about 0.001 mm, particularly between about 0.005 to about 5 mm, and more particularly between about 0.25 to about 2.5 mm. The through-air drying fabric 19 can also have protrusions 47 in more than one plane, if desired, to provide elevated regions having differing pitch depths. However, it should be
20 understood that the method of the present invention is not limited to any particular number or size of protrusions 47.

In addition, the through-air drying fabric 19 can also possess protrusions 47 positioned at any desired angle. For instance, the pitch direction of the protrusions 47 can be in the machine direction, or at an
25 angle up to about 45° from the machine direction. However, other angles can be utilized, particularly when forming a tissue having a more complex or irregular surface topography. Moreover, the pitch direction of different protrusions 47 of the through-air drying fabric 19 can also be positioned at different angles as well.

Regardless of the mechanism utilized, the "dryer side" of the fibrous web 11 is generally provided with a different pattern of elevated regions than the "roll side". Thus, for example, in one embodiment of the present invention, the pressure roll 45 simultaneously presses the fibrous web 11 into contact with the transfer fabric 17 and the through-air drying fabric 19 at the nip 40. The transfer fabric 17 has a first pattern of protrusions 37 and imparts the "roll side" of the web 11 with a first pattern of elevated regions, while the through-air drying fabric 19 has a second pattern of protrusions 47 and imparts the "dryer side" of the web 11 with a second pattern of elevated regions.

Once the pressure roll 45 impresses the fibrous web 11 against the through-air dryer 21, the through-air dryer 21 can then accomplish the removal of moisture from the web 11 by passing air through the web without applying any mechanical pressure. Through-air drying can also increase the bulk and softness of the web. In one embodiment, for example, the through-dryer can contain a rotatable, perforated cylinder and a hood 50 for receiving hot air blown through perforations of the cylinder as the through-air drying fabric 19 carries the fibrous web 11 over the upper portion of the cylinder. The heated air is forced through the perforations in the cylinder of the through-air dryer 21 and removes the remaining water from the fibrous web 11. The temperature of the air forced through the fibrous web 11 by the through-air dryer 21 can vary, but is typically from about 250°F to about 500°F. It should also be understood that other non-compressive drying methods, such as microwave or infrared heating, can be used. Moreover, if desired, certain compressive heating methods, such as Yankee dryers, may be used as well.

While supported by the through-air drying fabric 19, the web can then be dried to a consistency of about 95 percent or greater by the through-air dryer 21 and thereafter transferred to a carrier fabric 22. The dried basesheet 23 having two sides with elevated regions is then

transported to from the carrier fabric 22 to a reel 24, where it is wound. An optional turning roll 26 can be used to facilitate transfer of the web from the carrier fabric 22 to the reel 24.

5 It should be understood that the process described above is but one method for forming a tissue having elevated regions in accordance with the present invention. As stated, other well-known papermaking steps, such as creping, etc., may also be utilized in the present invention. Moreover, the process of forming the tissue of the present invention is also not limited to the employment of the above-mentioned devices for
10 imparting elevated regions onto a surface of a tissue (e.g., transfer fabrics, pressure rolls, through-air drying fabrics, etc.). In fact, other devices, such as other fabrics, rolls, and the like, may be employed to impart the desired elevated regions.

By providing each surface of a tissue with elevated regions, it has
15 been discovered that the tissue can have a variety of improved characteristics, such as improved softness and absorbency. For instance, because the tissue has relatively lightly bonded elevated regions on each surface, each side of the tissue typically has a soft feel.

Furthermore, a tissue of the present invention also possesses a
20 variety of other advantageous properties. For instance, the surfaces of the tissue can increase the absorption rate of a liquid and/or act as a barrier to liquid transfer through the tissue. In particular, a tissue of the present invention can generally have a relatively low fiber density gradient in the x-y (or machine direction) plane, while also having a substantial fiber density
25 gradient in the -z direction so that a higher density gradient exists in the -z direction than in the x-y plane. In particular, each tissue surface is imparted with elevated regions having different topographical characteristics, such as different depths, widths, direction, number of elevated regions per unit area, etc. For instance, in some embodiments,
30 one surface of the tissue has at least about 50% more elevated regions

per square inch than the other surface of the tissue, and particularly between about 50% to about 300%. Further, the pitch depth of the elevated regions of one surface of the tissue, in some embodiments, is between about 20% to about 100% greater than the pitch depth of the elevated regions of the other surface of the tissue.

Referring to Figures 7A-7B, for example, one embodiment of a single ply tissue 60 of the present invention is illustrated. As shown, the tissue 60 has a first surface 62 with elevated regions 63 and a second surface 72 with elevated regions 73 such that the first surface 62 has at least one different topographical characteristic than the second surface 72. Specifically, in this embodiment, the number (i.e., elevated regions per square inch) of elevated regions 73 is less than the number of elevations 63, while the elevated regions 73 have a greater pitch width and depth than the elevated regions 63. Due to their smaller number per square inch and greater size, the elevated regions 73 typically contain fibers that maintain a relatively larger distance from each other. As a result, less hydrogen bonds are likely to form between the fibers, and consequently, the elevated regions 73 tend to have a relatively lower fiber density. On the other hand, the elevated regions 63 typically contain fibers that tend to maintain a relatively shorter distance from each other. Thus, the elevated regions 63 of the first surface 62 tend to have a higher fiber density than the elevated regions 73 of the second surface 72. Accordingly, tissues made in accordance with the present invention have a substantial fiber density gradient in the -z direction.

In addition, as stated above, the tissues of the present invention also have a relatively low fiber density gradient in the x-y plane. For example, referring again to Figure 7A, the fiber densities of the first surface 62 and the second surface 72 do not substantially change in the x-y plane. In particular, it is believed that the use of elevated regions on each surface of the tissue causes much of the fiber compression to occur

near the smaller elevated regions 63 of the first surface 62, rather than the larger elevated regions 73 of the second surface 72. Thus, although the fiber densities in the x-y plane may vary somewhat for one surface (i.e., vary from the portions of the surface impressed between protrusions and portions of the surface forming the elevated regions), the fiber densities in the x-y plane do not substantially change, such as in conventional tissues.

By providing a substantial fiber density gradient in the -z direction and a relatively low fiber density gradient in the x-y plane, the resulting tissue can have a variety of improved characteristics, such as improved absorbency. In particular, an elevated region with less hydrogen bonding between fibers generally possesses a greater pore size distribution than an elevated region with more hydrogen bonding between fibers. For example, referring to Figure 7B, the larger elevated regions 73 of the second surface 72 have pores 74 with a certain area. In contrast, the smaller elevated regions 63 of the first surface 62 have pores 64 that are generally smaller in area than the pores 74. As a result, tissues of the present invention typically have a substantial pore size distribution gradient in the -z direction and a relatively low pore size distribution gradient in the x-y plane so that a higher pore size distribution gradient exists in the -z direction than in the x-y plane. Because tissues of the present invention have such a pore size distribution gradient in the -z direction, for example, it is believed that a capillary affect can occur that causes a liquid traveling therethrough to flow more readily through the larger pores than the smaller pores. The smaller pores act as a "vacuum" to attract liquid from the larger pores, which thus increases the rate of absorption of the liquid from the tissue surface. Moreover, because the liquid flows at a slower rate through the smaller pores, the liquid tends to reside in the smaller pores for a longer period of time. Further, as a result of having a relatively low pore size distribution density gradient in the x-y plane, the liquid can disperse from certain smaller pores to other smaller

pores in the x-y plane. As a result, the smaller pores can often act as a liquid transfer barrier for liquid flowing through the tissue.

For instance, referring to Figure 7B, a tissue of the present invention can have larger pores 74 and smaller pores 64. As a liquid contacts the second surface having larger pores 74, it quickly flows therethrough. Once the liquid flows through the larger pores, it then contacts the smaller pores 64 and is dispersed in the x-y plane. As a result, the absorption rate of the liquid is increased by one tissue surface, while a liquid transfer barrier for keeping the hands of a user relatively dry is provided by the other tissue surface. In other embodiments, the liquid may also first contact the first surface 62 having smaller pores 64. In such instances, the first surface 62 can still act as a liquid transfer barrier for keeping the hands of a user relatively dry.

It should be understood that a tissue of the present invention can be a single- or multi-ply tissue. When utilizing multi-ply tissues, one or more of the plies may be formed in accordance with the present invention. Moreover, in some instances, only the outer surfaces of the multi-ply tissue may be imparted with elevated regions. For instance, in one embodiment, a two-ply tissue can be formed. The first ply can have one surface with elevated regions and another surface with non-elevated regions. The second ply can also have one surface with elevated regions and another surface with non-elevated regions. The non-elevated surface of the first ply can then be placed adjacent to the non-elevated surface of the second ply to form a multi-ply tissue having two surfaces with elevated regions.

In an alternative embodiment, both surfaces of a single ply can have elevated regions, but of differing size. The first ply, for example, can have one surface with larger (e.g., depth, width, etc.) elevated regions and another surface with smaller elevated regions. The second ply can also have one surface with larger elevated regions and another surface with

smaller elevated regions. The smaller elevated surface of the first ply can then be placed adjacent to the smaller elevated surface of the second ply to form a multi-ply tissue with certain beneficial properties. In particular, a liquid be quickly absorbed into the center of the multi-ply tissue, and
5 dispersed in the x-y plane by the surfaces having smaller elevated regions:

In some instances, a multi-ply tissue made according to the present invention can be particularly useful to consumers. In particular, consumers often use more than one tissue at once. Thus, when the outer surface of each outer ply is formed with elevated regions in accordance
10 with the present invention, the liquid tends to flow along the x-y instead of in the z-direction. As a result, the time required for liquid transfer through the tissue is increased. This provides a unique benefit in that a consumer's hand can be protected without losing the tissue liquid absorbent capability.

15 In addition to the benefits and advantages discussed above, a tissue of the present invention can also have a variety of other benefits as well. For instance, a tissue having elevated regions on each surface can increase the caliper of the tissue, which allows for the use of smaller elevated regions (e.g., smaller pitch depth or width) to provide a desired
20 sheet thickness. Moreover, because each surface of the tissue possesses some hydrogen bonding, lint and slough may also be reduced.

While the invention has been described in detail with respect to the specific embodiments thereof, it will be appreciated that those skilled in the art, upon attaining an understanding of the foregoing, may readily
25 conceive of alterations to, variations of, and equivalents to these embodiments. Accordingly, the scope of the present invention should be assessed as that of the appended claims and any equivalents thereto.

WHAT IS CLAIMED:

1. An article of manufacture comprising:
a tissue having a first surface and a second surface, said first
surface of said tissue having elevated regions forming a first topography,
5 said second surface of said tissue having elevated regions forming a
second topography that differs in at least one topographical characteristic
from said first topography, wherein said tissue has a higher fiber density
gradient in the -z direction than in the x-y plane.
2. An article of manufacture as defined in claim 1, wherein said at
10 least one topographical characteristic is selected from the group consisting
of pitch depth, pitch width, direction, number of elevated regions per unit
area, and combinations thereof.
3. An article of manufacture as defined in claim 1, wherein said
15 second surface is imparted with at least 50% more elevated regions per
square inch than said first surface.
4. An article of manufacture as defined in claim 1, wherein said
second surface is imparted with between about 50% to about 300% more
elevated regions per square inch than said first surface.
- 20 5. An article of manufacture as defined in claim 1, wherein said
elevated regions of said second surface have a pitch depth of between
about 20% to about 100% greater than the pitch depth of said elevated
regions of said first surface.
- 25 6. An article of manufacture as defined in claim 1, wherein said
tissue has a higher pore size distribution gradient in the -z direction than in
the x-y plane.
7. An article of manufacture as defined in claim 1, wherein said
fibers contain pulp fibers.
8. An article of manufacture as defined in claim 1, wherein said
tissue has a basis weight less than about 120 grams per square meter.

9. An article of manufacture as defined in claim 1, wherein said tissue has a basis weight less than about 60 grams.

10. An article of manufacture as defined in claim 1, wherein said tissue contains multiple plies.

5 11. An article of manufacture as defined in claim 10, wherein one ply defines said first surface and another ply defines said second surface.

12. An article of manufacture as defined in claim 10, wherein one ply defines said first surface and said second surface.

10 13. A tissue comprising:
a fibrous web containing pulp fibers having a first surface and a second surface, said first surface of said fibrous web having elevated regions forming a first topography, said second surface of said fibrous web having elevated regions forming a second topography that differs in at least one topographical characteristic from said first topography, wherein
15 said fibrous web has a higher fiber density gradient in the -z direction than in the x-y plane and a higher pore size distribution gradient in the -z direction than in the x-y plane.

14. A tissue as defined in claim 13, wherein said at least one topographical characteristic is selected from the group consisting of pitch
20 depth, pitch width, direction, number of elevated regions per unit area, and combinations thereof.

15. A tissue as defined in claim 13, wherein said second surface is imparted with at least 50% more elevated regions per square inch than said first surface.

25 16. A tissue as defined in claim 13, wherein said second surface is imparted with between about 50% to about 300% more elevated regions per square inch than said first surface.

17. A tissue as defined in claim 13, wherein said elevated regions of said second surface have a pitch depth of between about 20% to about 100% greater than the pitch depth of said elevated regions of said first surface.

18. A tissue as defined in claim 13, wherein said tissue contains multiple plies, wherein one of said plies comprises said fibrous web such that an outer surface of said tissue is formed by said first surface of said fibrous web.

19. A tissue as defined in claim 18, further comprising a second fibrous web containing pulp fibers having a first surface and a second surface, said first surface of said fibrous web having elevated regions forming a third topography, said second surface of said fibrous web having elevated regions forming a fourth topography that differs in at least one topographical characteristic from said third topography, wherein said second fibrous web has a higher fiber density gradient in the -z direction than in the x-y plane and a higher pore size distribution gradient in the -z direction than in the x-y plane.

20. A tissue as defined in claim 19, wherein another one of said plies comprises said second fibrous web such that the other outer surface of said tissue is formed by said first surface of said second fibrous web.

21. A process comprising the steps of:

providing a paper web containing fibers having a first surface and a second surface;

contacting said first surface of said paper web with a first device containing protrusions so that said protrusions of said first device impart said first surface with elevated regions, said elevated regions of said first surface forming a first topography; and

contacting said second surface of said paper web with a second device containing protrusions so that said protrusions of said second

device impart said second surface with elevated regions, said elevated regions of said second surface forming a second topography that differs in at least one topographical characteristic from said first topography,
5 wherein said paper web has a higher fiber density gradient in the -z direction than in the x-y plane.

22. A process as defined in claim 21, wherein said first device is selected from the group consisting of a fabric, wire-mesh, and a roll.

23. A process as defined in claim 21, wherein said second device
10 is selected from the group consisting of a fabric, wire-mesh, and a roll.

24. A process as defined in claim 21, further comprising the step of applying pressure to said first surface while said first device is contacting said first surface.

25. A process as defined in claim 24, further comprising the step of
15 applying pressure to said second surface while said second device is contacting said second surface.

26. A process as defined in claim 24, wherein said pressure applied to said first surface is less than about 60 pounds per square inch.

27. A process as defined in claim 24, wherein said pressure
20 applied to said first surface is between about 35 to about 45 pounds per square inch.

28. A process as defined in claim 21, further comprising the step of applying pressure to said second surface while said second device is contacting said second surface.

25 29. A process as defined in claim 28, wherein said pressure applied to said second surface is less than about 60 pounds per square inch.

30 30. A process as defined in claim 28, wherein said pressure applied to said second surface is between about 35 to about 45 pounds per square inch.

31. A process as defined in claim 21, further comprising the step of drying said paper web.

32. A process as defined in claim 31, wherein said drying step is
5 accomplished by through-air drying.

33. A process as defined in claim 21, wherein said at least one topographical characteristic is selected from the group consisting of pitch depth, pitch width, direction, number of elevated regions per unit area, and combinations thereof.

10 34. A process as defined in claim 21, wherein said second surface is imparted with at least 50% more elevated regions per square inch than said first surface.

35. A process as defined in claim 21, wherein said elevated regions of said second surface have a pitch depth of between about 20%
15 to about 100% greater than the pitch depth of said elevated regions of said first surface.

1/5

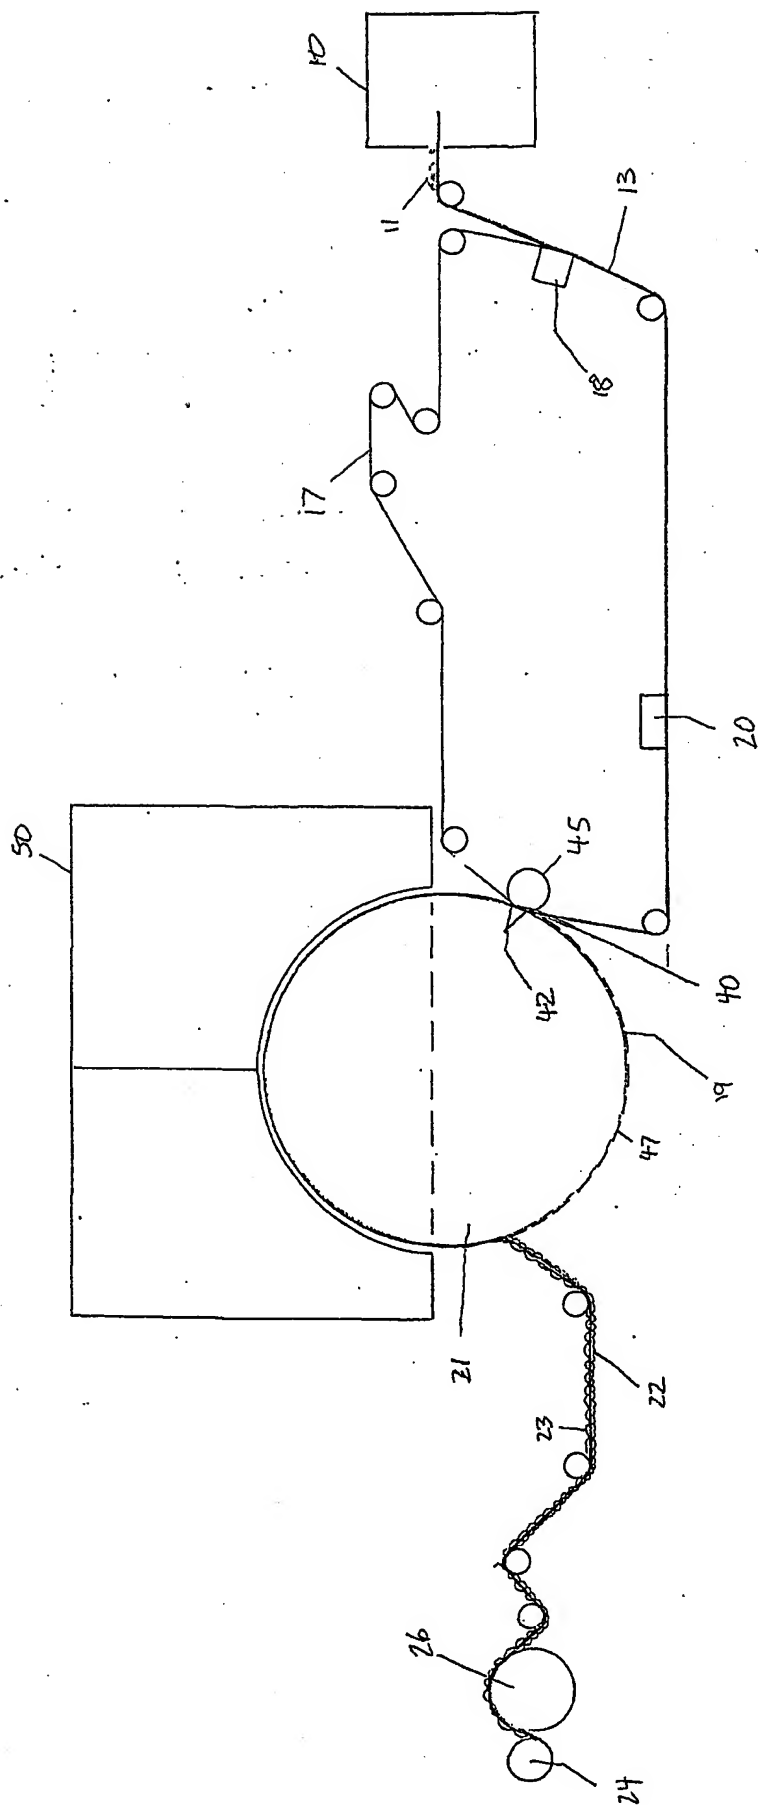


Fig. 1

2/5

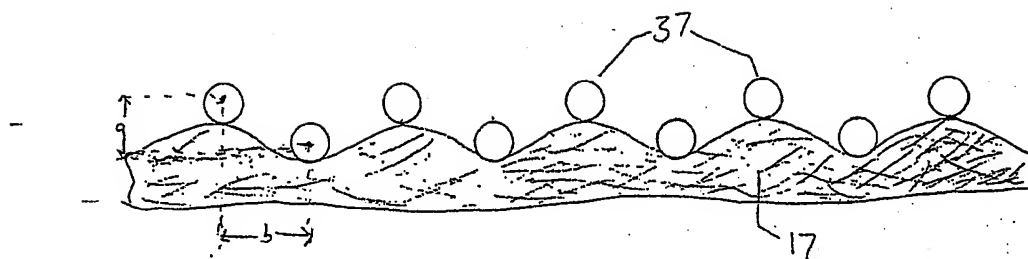
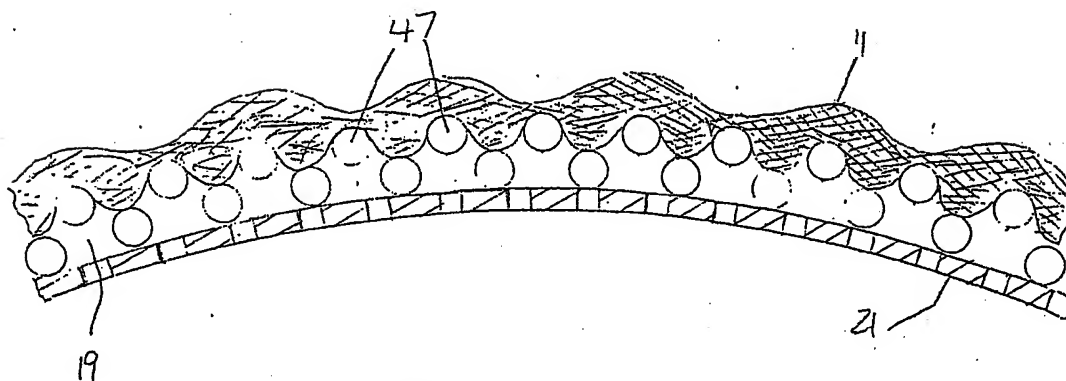
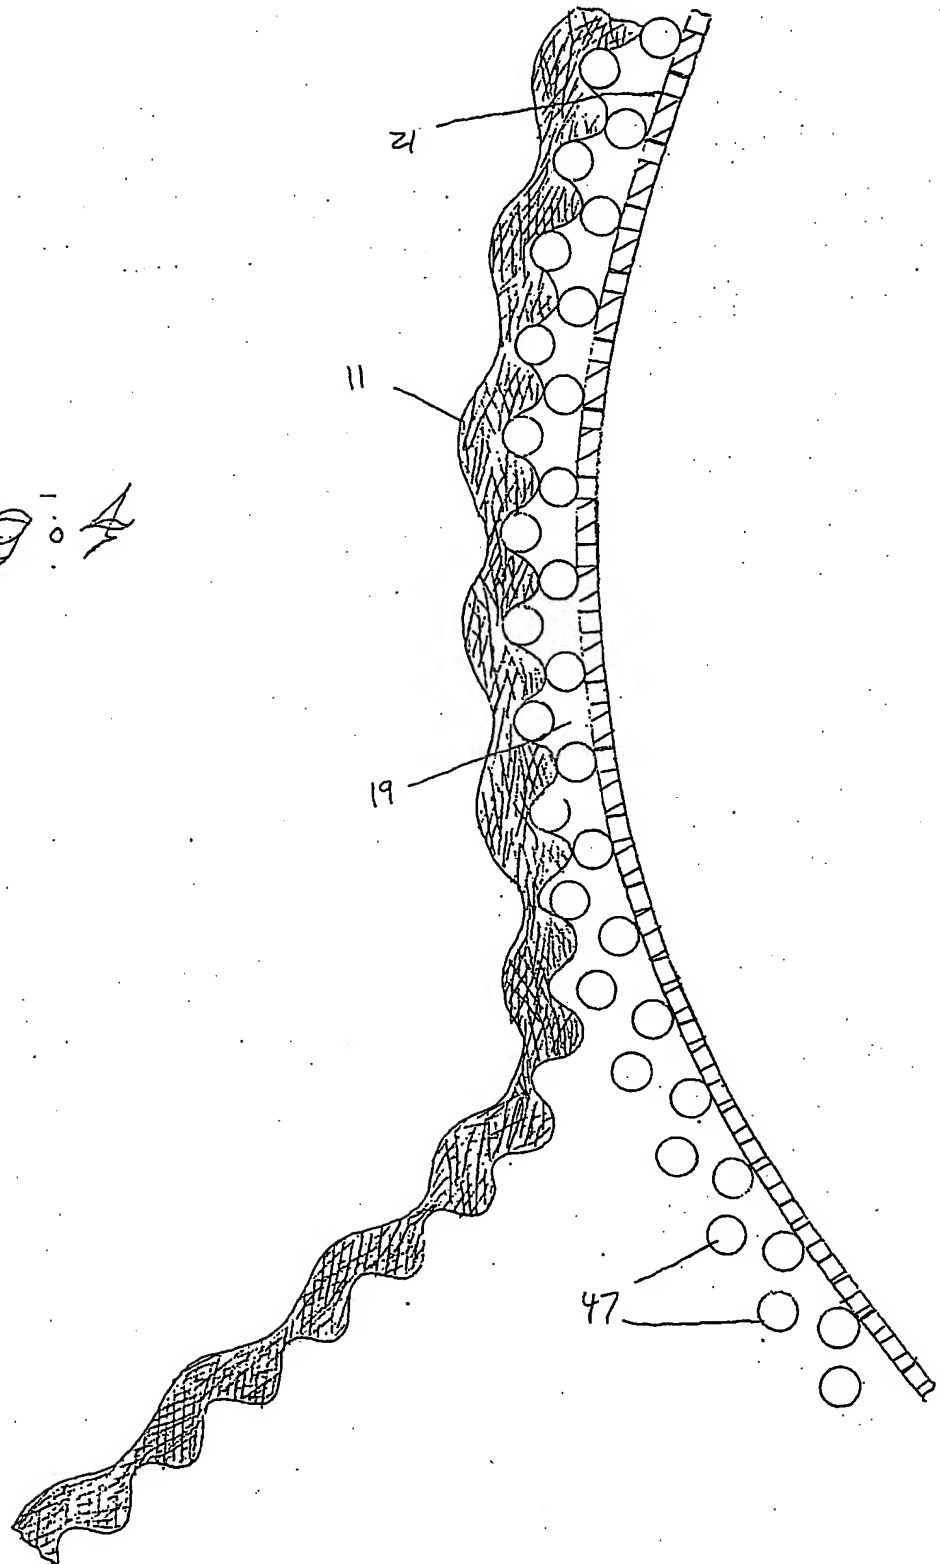
*Fig. 2**Fig. 3*

Fig. 4

4/5



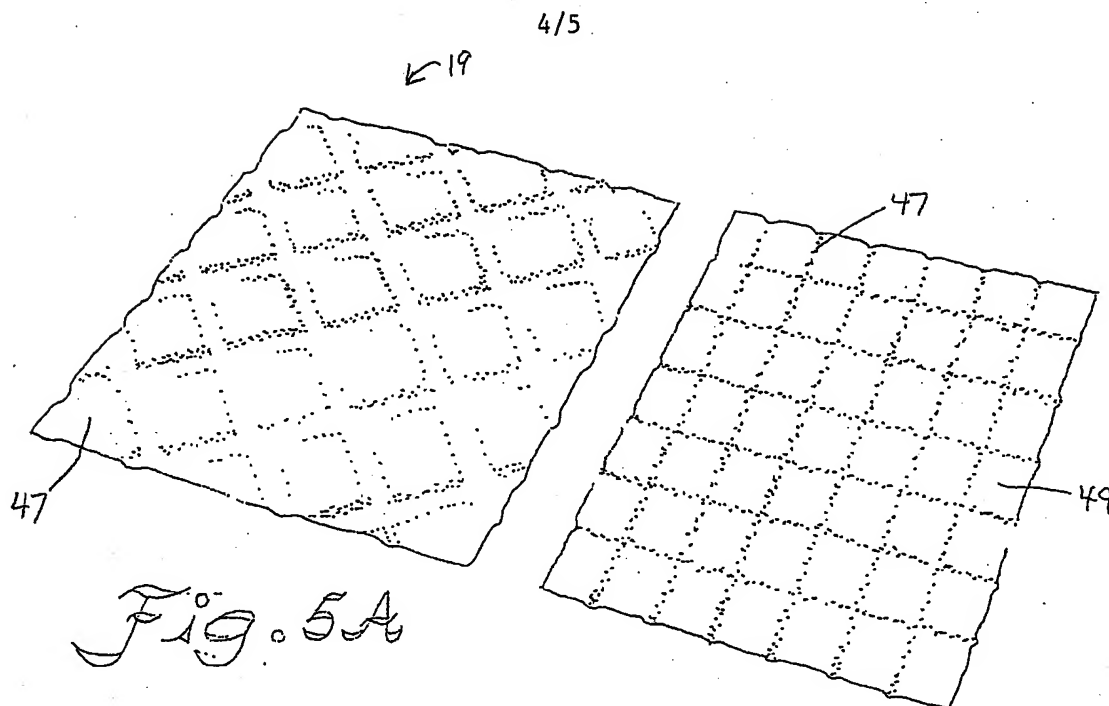


Fig. 5A



Fig. 5B

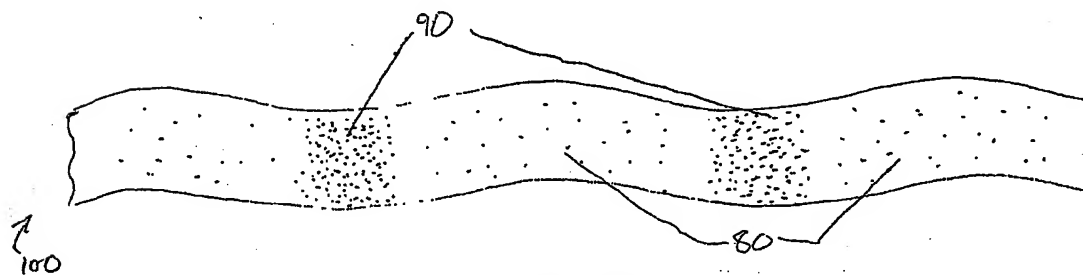

PRIOR ART
Fig. 6A

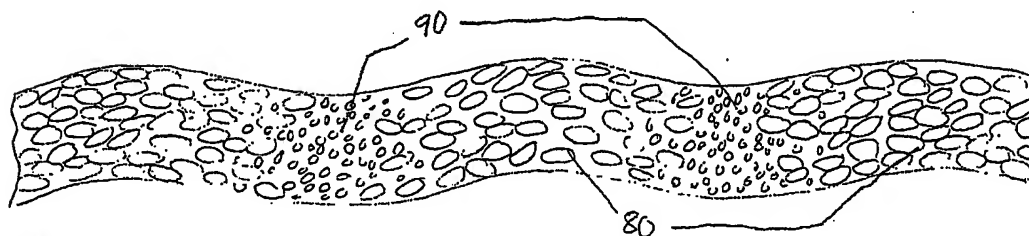

PRIOR ART
Fig. 6B

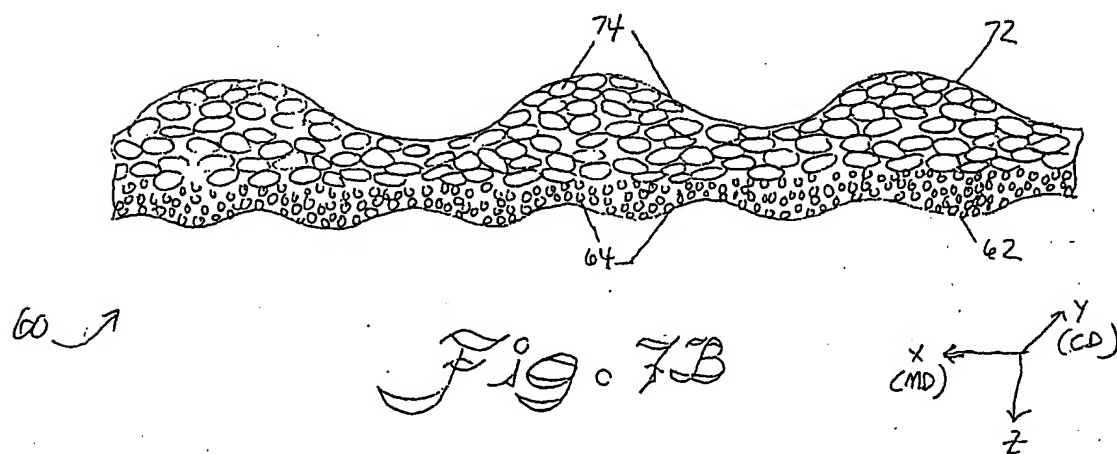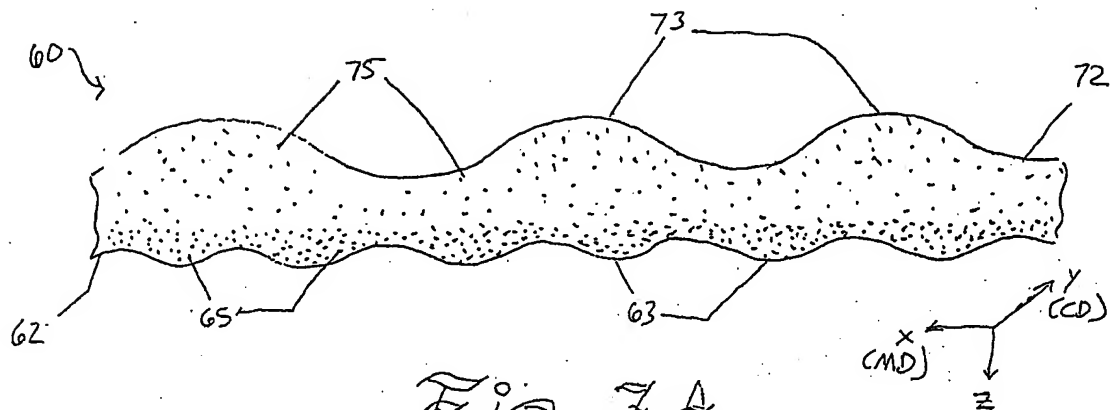

**(19) World Intellectual Property Organization
International Bureau**



(43) International Publication Date
21 February 2002 (21.02.2002)

PCT

(10) International Publication Number
WO 02/014605 A3


- (51) **International Patent Classification⁷:** **D21H 27/02,**
25/00
- (21) **International Application Number:** PCT/US01/41701
- (22) **International Filing Date:** 14 August 2001 (14.08.2001)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
09/641,100 17 August 2000 (17.08.2000) US
09/641,355 17 August 2000 (17.08.2000) US
- (71) **Applicant:** **KIMBERLY-CLARK WORLDWIDE, INC.** [US/US]; 401 North Lake Street, Neenah, WI 54956 (US).
- (72) **Inventors:** **CHEN, Patrick, P.**; 10 Timberline Court, Appleton, WI 54913 (US). **SPRANGERS, Daniel, R.**; W441 Cindy Ann Lane, Kaukauna, WI 54130 (US). **BURAZIN, Mark, A.**; 35 East County Road Y, Apt. 3, Oshkosh, WI 54901 (US). **SCHROEDER, Wen**; 232 East Carrington Lane, Appleton, WI 54913 (US).
- (74) **Agent:** **CASSIDY, Timothy, A.**; Dority & Manning, P.A., P.O. Box 1449, 55 Beattie Place, Suite 1600, One Liberty Square, Greenville, SC 29602 (US).
- (81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— *with international search report*
- (88) **Date of publication of the international search report:**
15 August 2002

Published:
— with international search report

(88) Date of publication of the international search report:
15 August 2002

[Continued on next page]

(54) Title: NON PLANAR TISSUE PAPER

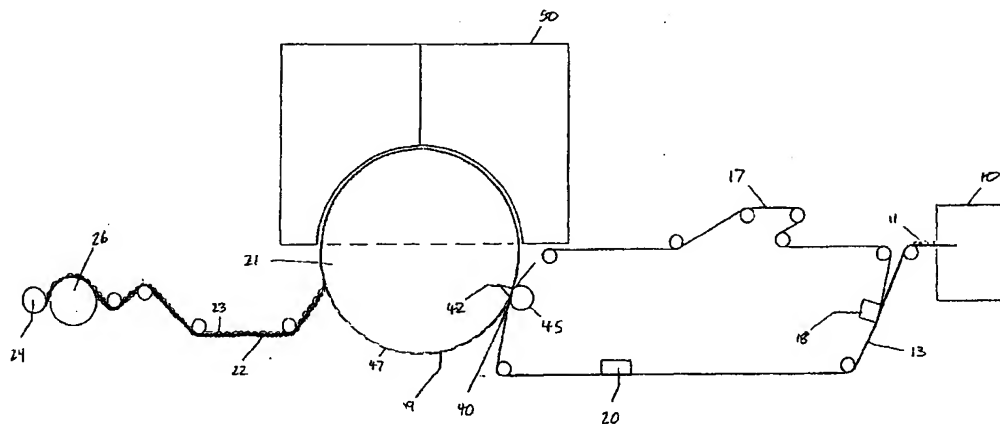

(57) Abstract: A tissue with two surfaces having elevated regions is provided. The elevated regions can be imparted onto the surfaces of the tissue utilizing various papermaking techniques and devices, such as using patterned fabrics, wire-mesh, and/or pressure rolls. A tissue of the present invention can have a substantial fiber density gradient in the -z direction and a relatively low fiber density gradient in the x-y plane. Moreover, the tissue can also have a substantial pore size distribution gradient in the -z direction and a relatively low pore size distribution gradient in the x-y plane for improved absorption properties.

WO 02/014605 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 01/41701

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D21H27/02 D21H25/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D21H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00 15907 A (PROCTER & GAMBLE) 23 March 2000 (2000-03-23)	
A	US 5 556 509 A (TROKHAN PAUL D ET AL) 17 September 1996 (1996-09-17) cited in the application	

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

23 April 2002

Date of mailing of the international search report

06/05/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Songy, O

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/41701

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0015907	A	23-03-2000	AU 5917099 A	03-04-2000
			EP 1112409 A1	04-07-2001
			WO 0015907 A1	23-03-2000
US 5556509	A	17-09-1996	AU 1840099 A	06-05-1999
			AU 1840199 A	06-05-1999
			AU 1840299 A	13-05-1999
			AU 704258 B2	15-04-1999
			AU 2706095 A	25-01-1996
			BR 9508086 A	12-08-1997
			CA 2192316 A1	11-01-1996
			CN 1332294 A	23-01-2002
			CN 1151773 A , B	11-06-1997
			DE 69512682 D1	11-11-1999
			DE 69512682 T2	27-04-2000
			DK 801697 T3	24-01-2000
			EP 0801697 A1	22-10-1997
			ES 2136861 T3	01-12-1999
			GR 3031412 T3	31-01-2000
			HK 1003900 A1	22-09-2000
			JP 3262801 B2	04-03-2002
			JP 10502140 T	24-02-1998
			KR 198379 B1	15-06-1999
			WO 9600813 A1	11-01-1996
			US 5776312 A	07-07-1998
			US 5709775 A	20-01-1998
			US 6200419 B1	13-03-2001
			US 5814190 A	29-09-1998

THIS PAGE BLANK (USPTC)